



Meulenbroek
**Perscontainers
Compactors**



STATIONARY COMPACTOR MODEL MSP

www.meulenbroek.nl

Stationary compactor model MSP



The Meulenbroek stationary compactors are reliable machines. Because of their short length they can be utilized on many places. Changeable containers of the model MSP-C can be connected to the MSP stationary compactor. The volume of these containers varies 15 up to 34 m³. The installations can be equipped with a number of additional options such as:

- ✓ A tilting device for wheelie bins.
- ✓ A hydraulic container / compactor connection.
- ✓ A hydraulic closing plate in the opening of the container-door.
- ✓ Exchange of containers by a lorry.

A few important benefits of these installations are:

Benefits:

- Saving on processing costs
- High processing capacity
- Safe (CE) and a very long lifespan
- Low maintenance costs
- Low energy consumption


Suitable for:

- Distribution centers
- Waste transfer locations
- Companies with larger amounts of waste or cardboard



Technical data stationary compactor MSP

| Model MSP | | 1100 | 1300 | 1500 | 1600-1 | 1700 | 2000-SP | 2000 |
|---------------------|-----|------------|------------|------------|------------|------------|------------|------------|
| Length L | mm | 2385 | 2585 | 2350 | 4716 | 3150 | 4640 | 4640 |
| Width B | mm | 1860 | 1860 | 2170 | 1620 | 2170 | 2220 | 2220 |
| Height H | mm | 1294 | 1294 | 1294 | 1075 | 1403 | 1300 | 1585 |
| Length filling area | mm | 2170 | 2370 | 2160 | 3785 | 2875 | 4640 | 4640 |
| Width filling area | mm | 1490 | 1490 | 1800 | 1400 | 1800 | 2000 | 2000 |
| Length before press | mm | 1100 | 1300 | 1400 | 1660 | 1600 | 1900 | 1900 |
| Width pressblock | mm | 1490 | 1490 | 1800 | 1400 | 1800 | 2000 | 2000 |
| Height pressblock | mm | 600 | 600 | 550 | 600 | 700 | 800 | 1000 |
| Cycle time | sec | 57 | 57 | 57 | 67 | 55 | 40 | 60 |
| Press force | kn | 330 | 330 | 330 | 320 | 400 | 400 | 500 |
| Engine power | kw | 7,5 | 7,5 | 7,5 | 7,5 | 7,5 | 11 | 11 |
| Power | v/a | 400/25 tr. | 400/25 tr. | 400/25 tr. | 400/25 tr. | 400/25 tr. | 400/50 tr. | 400/50 tr. |

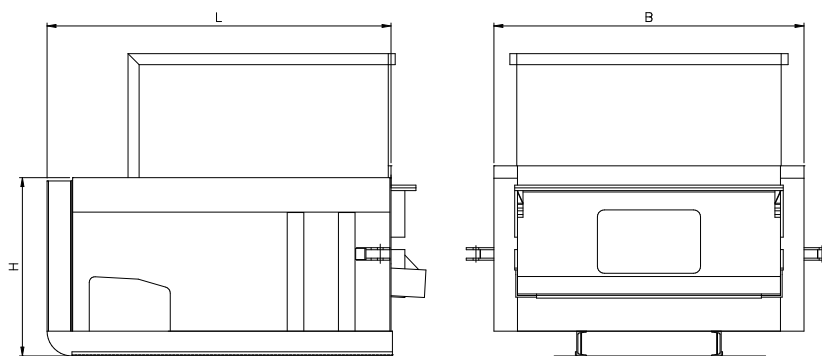

Technical data container MSP-C

| Model MSP-C | | 15 | 20 | 25 | 30 | 34 |
|-------------------------------|----------------|-------|-------|-------|-------|-------|
| Volume | m ³ | 15 | 20 | 25 | 30 | 34 |
| Length L | mm | 3850 | 4375 | 5440 | 6307 | 7107 |
| Width B | mm | 2514 | 2530 | 2530 | 2530 | 2530 |
| Height H | mm | 2269 | 2630 | 2630 | 2630 | 2630 |
| Weight Approx. ^(*) | kg | 2100 | 2450 | 2850 | 3375 | 3700 |
| Max. total weight | kg | 14000 | 14500 | 15750 | 17500 | 17750 |

(*) Weight of a standard container, without closing plate in the door.

